


GF6624.230

GF6624.300

Engineering Drawing (mm)

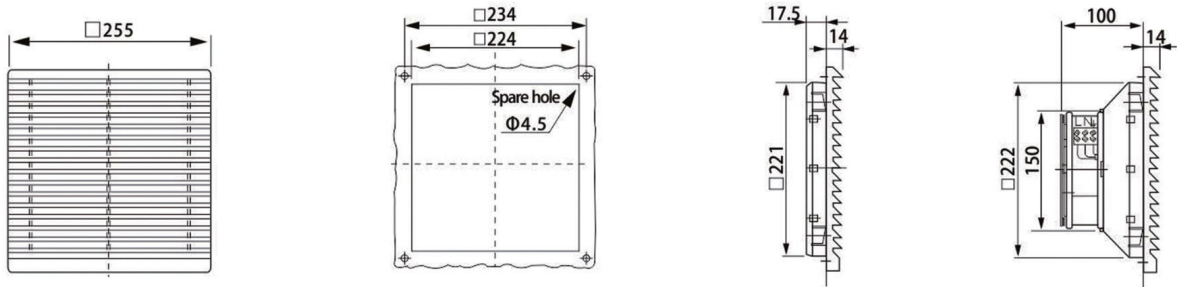

Specifications

Model No. (Filter fan unit)	GF6624.230	GF6624.115	GF6624.024
Rated operating voltage	220 ~ 240V	110 ~ 120V	24V
Frequency	50/60 Hz	50/60 Hz	/
Air flow rate (Free blow)	220/240 m ³ /h		240 m ³ /h
Air flow rate with filter	1 x GF6624.300:155/185 m ³ /h		
Axial fan	Self starting shaded pole motor		
Max. rated current	0.24/0.22A	0.48/0.46A	0.58A
Rated Power	38/36W		14W
Noise level	50/52 dB(A)		50 dB(A)
Operating temperature range	-30°C ~ 70°C		
Model No. (Exit filter)	GF6624.300		
Optional Fan Size	1) 172x150x51mm		
Material	ABS; ABS plastic with UL 94V-0 as customized option		
Air flow direction	Air-in as default; air-out optional		
Protection Level	IP54		