


## Engineering Drawing (mm)

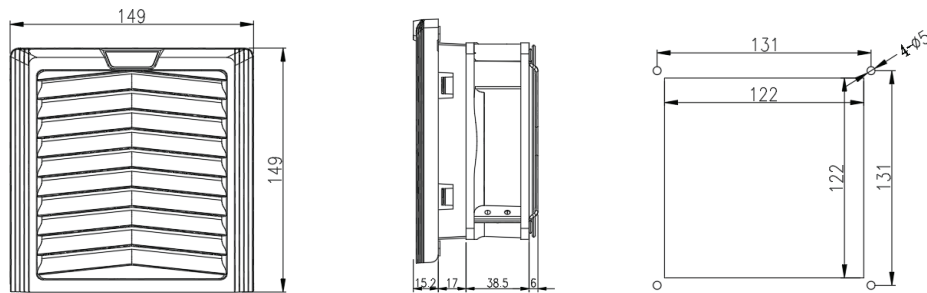

## Specifications

Model No. (Filter fan unit)	GX122.024L-Z08	GX122.024M-Z08	GX122.024H-Z08
Rated operating voltage	24V	24V	24V
Fan Model	GD12038L24B-Z08	GD12038M24B-Z08	GD12038H24B-Z08
Fan Certification	UL CE	UL CE	UL CE
Speed	2500RPM	3500RPM	4500RPM
Air flow rate with filter	61.71m <sup>3</sup> /h	90.44m <sup>3</sup> /h	116.28m <sup>3</sup> /h
Air Pressure with filter	51.35Pa	100.94Pa	166.6Pa
Axial fan	Brushless DC axial fan		
Max. rated current	0.15A	0.3A	0.8A
Rated Power	3.6W	7.2W	19.2W
Noise level	41.8dB(A)	50.4dB(A)	56.6dB(A)
Operating temperature range	-30°C ~ 70°C		
Model No. (Exit filter)	GX122.300		
Material	ABS; ABS plastic with UL 94V-0 as customized option		
Air flow direction	Air-in as default; air-out optional		
Protection Level	IP54		