ISO9001
ISO14001

ACDCFAN

Product Guide
Quick-Selection
2026

ABOUT US

The ACDCFAN develops and manufactures compact cooling fans used in a wide range of industries, including Industrial machinery, Electric power Industry, PV field, Energy storage, and Telecommunications, among others. ACDCFAN produces AC axial fans, AC radial fans, DC axial fans, DC radial fans, EC axial fans and AC&DC Fan filter units for customers around the world. With over 20 years of dedicated experience in the field, ACDCFAN has grown to be a leading professional manufacturer of high-quality fans based in China.

ACDCFAN has been at the forefront of the industry, consistently providing cutting-edge solutions to meet the diverse needs of our customers. We are an ISO certified company with ISO9001 and ISO14001 certificates. Our cooling fans are RoHS compliant and designed to meet the toughest standards of UL, CE and TUV. The commitment of ACDCFAN to innovation, reliability and customer satisfaction has made us a trusted partner for businesses worldwide. We understand that every application is unique, the OEM/ODM/OBM services are available to offer customized solutions. ACDCFAN strives to be a respected global brand and continue to contribute to the future development of the cooling fan industry.

CONTENT

AC Fans 2

AC Axial Fans
- GW Series 3
- GN Series 4-6

AC Radial Fans
- GRA Series 6

DC Fans 7

DC Axial Fans
- GD Series 8-14

DC Radial Fans
- GRD Series 15-16

EC Fans 17

EC Axial Fans
- GE Series 18

Fan and Filter Units & Fan Accessories 19

- Fan and Filter Units 20
- Plastic Fan Filter 20
- Plastic Fan Guard 20
- Aluminum Screen Filter 20
- Metal Finger Guard 20

AC Axial Fans & AC Radial Fans

3 Series - GW, GN and GR

Features

- Size range from 80mm to 280mm
- Voltage: 110V, 220V, 380V
- Operation temperatures range: -30℃~ +80℃(Ball bearing)
- Airflow from 16.5 CFM to 1150 CFM (28m³/h to 1955 m³/h)
- Service life from 30,000 to 50,000 hours

Certificates

Please feel free contact us by info@acdcfan.com.cn for any customized requirements
如果您对以上产品有任何定制需求，请随时联系我们

AC Axial Fans - Full Metal GW Series

Picture	Size	Model	Voltage	Freq.	Current	Power	Speed	Noise	Max. Air Flow		Pressure	Capacitor
	mm		VAC	Hz	A	W	RPM	dB(A)	m^3/h	CFM	mmH_2O	uf
	80x80x38	GW80B	100/125	50/60	0.18/0.16	17/14	2700/3100	30/36	47.6/56.1	28/33	4.8/4.4	/
			200/240	50/60	0.09/0.08	17/14	2700/3100					
	92x92x38	GW92B	100/125	50/60	0.18/0.16	17/14	2600/3000	38/40	78.2/91.8	46/54	6.8/5.8	/
			200/240	50/60	0.09/0.08	17/14	2600/3000					
	120x120x38	GW120B	100/125	50/60	0.22/0.2	19/16.7	2600/2900	42/46	151.21/169.9	89/100	6.81/6.17	/
			200/240	50/60	0.12/0.11	19/16.7	2600/2900					
			360/400	50/60	0.06/0.05	19/16.7	2600/2900					
	172x150x55	GW170E-7	110/120	50/60	0.50/0.45	37/35	2700/3000	54/56	303.68/336.67	178.74/198.16	12.92/13.85	/
			220/240	50/60	0.25/0.22	37/35	2700/3000					
			380/400	50/60	0.12/0.10	37/35	2700/3000					
NEW	172x150x55	GW170E-5 Reverse Impeller	110/120	50/60	0.50/0.45	37/35	2700/3000	59/62	364.03/411.62	214.26/242.26	11.5/12.6	/
			120/240	50/60	0.25/0.22	37/35	2700/3000					
			380/400	50/60	0.12/0.10	37/35	2700/3000					
	206x206x72	GW205Z	100/125	50/60	0.55/0.65	60/80	2600/2800	59/61	850/926.5	500/545	17.3/16.2	4uf/250v
			200/240	50/60	0.3/0.35	60/80	2600/2800	59/61	850/926.5	500/545	17.3/16.2	2.2uf/450v
			360/400	50/60	0.22/0.2	60/80	2600/2800	59/61	850/926.5	500/545	17.3/16.2	1uf/630v
	225x225x80	GW225H	100/125	50/60	0.55/0.65	55/65	2600/2800	59/61	850/926.5	500/545	17.3/16.2	4uf/250v
			200/240	50/60	0.3/0.35	55/65	2600/2800	59/61	850/926.5	500/545	17.3/16.2	2.2uf/450v
			360/400	50/60	0.22/0.2	55/65	2600/2800	59/61	850/926.5	500/545	17.3/16.2	0.7uf/630v
	Ø254x89	GW250K	100/125	50/60	0.9/1	100/130	2600/2800	65/68	1394/1530	820/900	18/16	6.0uf/450v
			200/240	50/60	0.5/0.65	100/130	2600/2800	65/68	1394/1530	820/900	18/16	3.0uf/400v
			360/400	50/60	0.25/0.27	100/130	2600/2800	65/68	1394/1530	820/900	18/16	1uf/630v
	280x280x80	GW280H	100/125	50/60	1/1.1	110/150	2550/2700	69/71	1725/1785	1015/1050	19.8/16.8	10uf/250v
			200/240	50/60	0.55/0.65	110/150	2550/2700	69/71	1725/1785	1015/1050	19.8/16.8	4uf/450v
			360/400	50/60	0.3/0.35	110/150	2550/2700	69/71	1725/1785	1015/1050	19.8/16.8	1uf/630v
	280x280x90	GW280K	100/125	50/60	1/1.1	110/150	2700/3000	70/72	1870/1955	1100/1150	27.8/22.6	10uf/250v
			200/240	50/60	0.6/0.7	110/150	2700/3000	70/72	1870/1955	1100/1150	27.8/22.6	4uf/450v
			360/400	50/60	0.35/0.37	110/150	2700/3000	70/72	1870/1955	1100/1150	27.8/22.6	1uf/630v

Customization

- High temperature resistnce up to 120°C
- Anti-Salt spray

AC Axial Fans - Classic GN Series

Picture	Size	Model	Voltage	Freq.	Current	Power	Speed	Noise	Max. Air Flow		Pressure
	mm		VAC	Hz	A	W	RPM	dB(A)	m^3/h	CFM	mmH_2O
	80x80x25	GN80A	100/125	50/60	0.12/0.11	12/11	2500/2800	26/28	28/30.9	16.5/18.2	3.02/2.8
			200/240	50/60	0.07/0.06	12/11	2500/2800	26/28	28/30.9	16.5/18.2	3.02/2.8
			360/400	50/60	0.05/0.04	12/11	2500/2800	26/28	28/30.9	16.5/18.2	3.02/2.8
	80x80x38	GN80B	100/125	50/60	0.16/0.14	13/12	2400/3000	28/33	33.8/43	19.9/25.3	2.8/4.1
			200/240	50/60	0.1/0.08	13/12	2400/3000	28/33	33.8/43	19.9/25.3	2.8/4.1
			360/400	50/60	0.05/0.04	13/12	2400/3000	28/33	33.8/43	19.9/25.3	2.8/4.1
	92x92x25	GN92A	100/125	50/60	0.12/0.11	12/11	2350/2700	34/36	44.2/52.7	26/31	4.14/3.01
			200/240	50/60	0.07/0.06	12/11	2350/2700	34/36	44.2/52.7	26/31	4.14/3.01
			360/400	50/60	0.05/0.04	12/11	2350/2700	34/36	44.2/52.7	26/31	4.14/3.01
	92x92x38	GN92B	100/125	50/60	0.16/0.14	13/12	2300/2500	31/35	54.4/69.7	32/41	4.6/3.5
			200/240	50/60	0.1/0.08	13/12	2300/2500	31/35	54.4/69.7	32/41	4.6/3.5
			360/400	50/60	0.05/0.04	13/12	2300/2500	31/35	54.4/69.7	32/41	4.6/3.5
	110x110x25	GN110A	100/125	50/60	0.12/0.11	12/11	2000/2200	36/38	69.7/76.5	41/45	2.99/2.4
			200/240	50/60	0.07/0.06	12/11	2000/2200	36/38	69.7/76.5	41/45	2.99/2.4
			360/400	50/60	0.05/0.04	12/11	2000/2200	36/38	69.7/76.5	41/45	2.99/2.4
	120x120x25	GN120A-5	100/125	50/60	0.12/0.11	12/11	1800/2000	39/41	76.5/89.7	45/52.8	2.79/2.56
			200/240	50/60	0.07/0.06	12/11	1800/2000	39/41	76.5/89.7	45/52.8	2.79/2.56
			360/400	50/60	0.05/0.04	12/11	1800/2000	39/41	76.5/89.7	45/52.8	2.79/2.56
	120x120x25	GN120A-7	100/125	50/60	0.14/0.12	13/12	2000/2200	39/41	91.8/95.2	54/56	3.1/2.8
			200/240	50/60	0.08/0.07	13/12	2000/2200	39/41	91.8/95.2	54/56	3.1/2.8
			360/400	50/60	0.05/0.04	13/12	2000/2200	39/41	91.8/95.2	54/56	3.1/2.8
	120x120x25	GN120A Metal	100/125	50/60	0.16/0.14	14/13	2200/2400	39/41	100/113	59/67	4.6/4.0
			200/240	50/60	0.1/0.08	14/13	2200/2400	39/41	100/113	59/67	4.6/4.0
			360/400	50/60	0.06/0.05	14/13	2200/2400	39/41	100/113	59/67	4.6/4.0
	120x120x38	GN120B-5	100/125	50/60	0.24/0.22	19/18	2600/2900	42/44	130.9/139.4	77/82	6.2/5.4
			200/240	50/60	0.12/0.11	19/18	2600/2900	42/44	130.9/139.4	77/82	6.2/5.4
			360/400	50/60	0.09/0.08	19/18	2600/2900	42/44	130.9/139.4	77/82	6.2/5.4
	120x120x38	GN120B-7	100/125	50/60	0.24/0.22	19/18	2500/2700	44/46	136/149.6	80/88	5.6/5.1
			200/240	50/60	0.12/0.11	19/18	2500/2700	44/46	136/149.6	80/88	5.6/5.1
			360/400	50/60	0.09/0.08	19/18	2500/2700	44/46	136/149.6	80/88	5.6/5.1

Please feel free contact us by info@acdcfan.com.cn for any customized requirements

如果您对以上产品有任何定制需求，请随时联系我们

AC Axial Fans - Classic GN Series

Picture	Size	Model	Voltage	Freq.	Current	Power	Speed	Noise	Max. Air Flow		Pressure	Capacitor
	mm		VAC	Hz	A	W	RPM	dB(A)	m³/h	CFM	mmH_2O	uf
	120x120x38	GN120B Metal	100/125	50/60	0.24/0.22	19/18	2600/3000	43/45	142.8/161.5	84/95	7.4/6.6	/
			200/240	50/60	0.12/0.11	19/18	2600/3000	43/45	142.8/161.5	84/95	7.4/6.6	/
			360/400	50/60	0.09/0.08	19/18	2600/3000	43/45	142.8/161.5	84/95	7.4/6.6	/
	135x135x38	GN135B	100/125	50/60	0.24/0.22	20/18	2600/2800	45/47	146.2/161.5	86/95	6.3/4.3	/
			200/240	50/60	0.12/0.11	20/18	2600/2800	45/47	146.2/161.5	86/95	6.3/4.3	/
			360/400	50/60	0.09/0.08	20/18	2600/2800	45/47	146.2/161.5	86/95	6.3/4.3	/
	150x150x50	GN150D-5	100/125	50/60	0.45/0.42	30/28	2700/3000	53/59	255/272	150/160	10.8/9.5	/
			200/240	50/60	0.24/0.22	30/28	2700/3000	53/59	255/272	150/160	10.8/9.5	/
			360/400	50/60	0.12/0.11	30/28	2700/3000	53/59	255/272	150/160	10.8/9.5	/
	150x150x50	GN150D-7	100/125	50/60	0.45/0.42	32/30	2500/2600	54/58	297.5/314.5	175/185	7.3/6.2	/
			200/240	50/60	0.24/0.22	32/30	2500/2600	54/58	297.5/314.5	175/185	7.3/6.2	/
			360/400	50/60	0.12/0.11	32/30	2500/2600	54/58	297.5/314.5	175/185	7.3/6.2	/
	172x151x39	GN170B	100/125	50/60	0.4/0.38	25/24	2400/2700	51/54	212.5/246.5	125/145	9.2/8.1	/
			200/240	50/60	0.2/0.18	25/24	2400/2700	51/54	212.5/246.5	125/145	9.2/8.1	/
			360/400	50/60	0.1/0.09	25/24	2400/2700	51/54	212.5/246.5	125/145	9.2/8.1	/
	172x150x51	GN170D-5	100/125	50/60	0.45/0.42	30/28	2700/3000	53/59	255/272	150/160	10.8/9.5	/
			200/240	50/60	0.24/0.22	30/28	2700/3000	53/59	255/272	150/160	10.8/9.5	/
			360/400	50/60	0.12/0.11	30/28	2700/3000	53/59	255/272	150/160	10.8/9.5	/
	172x150x51	GN170D-7	100/125	50/60	0.45/0.42	32/30	2500/2600	54/58	297.5/314.5	175/185	12.23/9.38	/
			200/240	50/60	0.24/0.22	32/30	2500/2600	54/58	297.5/314.5	175/185	12.23/9.38	/
			360/400	50/60	0.12/0.11	32/30	2500/2600	54/58	297.5/314.5	175/185	12.23/9.38	/
	172x150x51	GN170D Xflow	100/125	50/60	0.23/0.24	24.5/26.2	2700/3000	54.5/58.7	328.8/420.8	193.5/214.5	11.8/8.62	3uf/450V
			200/240	50/60	0.13/0.15	28.7/32	2700/3000	54.5/58.7	328.8/420.8	193.5/214.5	11.8/8.62	1uf/400V
	172x150x51	GN170D-R Xflow	100/125	50/60	0.23/0.24	24.5/26.2	2700/3000	54.5/58.7	328.8/420.8	193.5/214.5	11.8/8.62	3uf/450V
			200/240	50/60	0.13/0.15	28.7/32	2700/3000	54.5/58.7	328.8/420.8	193.5/214.5	11.8/8.62	1uf/400V
	172x150x51	GN170D Metal	100/125	50/60	0.45/0.42	32/30	2600/3000	53/55	297/323	175/190	9.5/6.8	/
			200/240	50/60	0.24/0.22	32/30	2600/3000	53/55	297/323	175/190	9.5/6.8	/
			360/400	50/60	0.15/0.14	32/30	2600/3000	53/55	297/323	175/190	9.5/6.8	/
	180x180x60	GN180F	100/125	50/60	0.54/0.52	42/40	2700/3000	61/64	442/493	260/290	11.95/4.1	/
			200/240	50/60	0.35/0.32	42/40	2700/3000	61/64	442/493	260/290	11.95/4.1	/
			360/400	50/60	0.2/0.18	42/40	2700/3000	61/64	442/493	260/290	11.95/4.1	/

AC Axial Fans - Classic GN Series

Picture	Size	Model	Voltage	Freq.	Current	Power	Speed	Noise	Max. Air Flow		Pressure	Capacitor
	mm		VAC	Hz	A	W	RPM	dB(A)	m³/h	CFM	mmH_2O	uf
	200x200x60	GN200F	100/125	50/60	0.6/0.58	45/42	2600/2700	63/65	544/561	320/330	6.28/2.25	/
			200/240	50/60	0.35/0.32	45/42	2600/2700	63/65	544/561	320/330	6.28/2.25	/
			360/400	50/60	0.2/0.18	45/42	2600/2700	63/65	544/561	320/330	6.28/2.25	/
	Ø220x60	GN220F	100/125	50/60	0.6/0.58	45/42	2600/2700	63/65	544/561	320/330	5.34/2.1	/
			200/240	50/60	0.35/0.32	45/42	2600/2700	63/65	544/561	320/330	5.34/2.1	/
			360/400	50/60	0.2/0.18	45/42	2600/2700	63/65	544/561	320/330	5.34/2.1	/
	206x206x72	GN205Z	100/125	50/60	0.6/0.7	60/80	2800/3200	67/69	1071/1156	630/680	22/11.7	6uf/250v
			200/240	50/60	0.3/0.35	60/80	2800/3200	67/69	1071/1156	630/680	22/11.7	3uf/450v
	206x206x72	GN205Z Metal	100/125	50/60	0.6/0.7	60/80	2800/3200	67/69	1071/1156	630/680	22/11.7	6uf/250v
			200/240	50/60	0.3/0.35	60/80	2800/3200	67/69	1071/1156	630/680	22/11.7	3uf/450v
	Ø254x89	GN250K	100/125	50/60	0.6/0.7	50/70	2550/2450	70/68	836.4/736.1	492/433	13.9/12.2	4uf/250v
			200/240	50/60	0.25/0.3	50/70	2550/2450	70/68	836.4/736.1	492/433	13.9/12.2	1.5uf/450v
			360/400	50/60	0.15/0.2	50/70	2550/2450	70/68	836.4/736.1	492/433	13.9/12.2	0.7uf/630v

AC Radial Fans - GR Series

Picture	Size	Model	Voltage	Freq.	Current	Power	Speed	Noise	Max. Air Flow		Static Pressure		Capacitor
	mm		VAC	Hz	A	W	RPM	dB(A)	m³/h	CFM	Pa	mmH_2O	uf
	Ø175x65	GR175A	100/125	60	0.56	51	3100	68	570	335	350	35.7	3.3uf/630v
			200/240	50/60	0.28/0.25	51/56	2700/3100	63/68	490/570	288/335	250/350	25.5/35.7	1.5uf/630v
	Ø190x61	GR190A	100/125	50/60	0.65/0.75	70/90	2600/2950	62/64	570/620	336/365	330/430	33.6/43.8	8.0uf/250v
			200/240	50/60	0.30/0.45	70/90	2600/2950	62/64	570/620	336/365	330/430	33.6/43.8	2.2uf/630v
	Ø220x64	GR220A	100/125	50/60	0.90/1.17	115/134	2600/2950	73/74	885/990	512/583	420/560	42.8/57.1	8.0uf/250v
			200/240	50/60	0.45/0.46	90/98	2600/2950	73/74	885/990	512/583	420/560	42.8/57.1	8.0uf/250v
	Ø225x89	GR225A	115	50/60	1.3/1.7	120/180	2500/2700	69/71	1200/1340	706/789	550/700	56.1/71.4	20uf/450v
			230	50/60	0.55/0.8	120/180	2500/2700	69/71	1200/1340	706/789	550/700	56.1/71.4	4uf/630v
	Ø250x86	GR250A	100/125	50/60	1.3/1.8	120/210	2400/2500	75/78	1450/1490	854/878	580/740	59.1/75.5	20uf/450v
			200/240	50/60	0.6/0.85	120/210	2400/2500	75/78	1450/1490	854/878	580/740	59.1/75.5	4uf/630v
	181x174x87	GR130FLJ5	200/240	50/60	0.55/0.50	120/160	2700/3000	72.5/74	339.8/407.8	200/240	342/314	35/32	/

Please feel free contact us by info@acdcfan.com.cn for any customized requirements
如果您对以上产品有任何定制需求，请随时联系我们

DC Axial Fans & DC Radial Fans

2 Series - GD and GRD

Features

- Size range from 25mm to 254mm
- Voltage: 5V, 12V, 24V, 48V
- Operation temperatures range: -30°C~ +70°C (Ball bearing)
- Speed from 2000 rpm to 20,000 rpm
- Service life from 30,000 to 70,000 hours
- Optional functions: PWM, FG, RD

Customization

- IP68 protection level
- High temperature resistance up to 100°C

Certificates

DC Axial Fans - GD Series

Picture	Size	Model	Voltage	Voltage Range	Current	Power	Speed	Max. Air Flow		Max.Static Pressure		Noise
	mm	No.	VDC	VDC	A	W	RPM	m³/min	CFM	mmH_20	INH_20	dB(A)
	25x25x10	GD2510L05	5	3.6 to 6.8	0.05	0.25	10000	0.04	1.59	2.27	0.09	27.9
		GD2510L12	12	6.0 to 13.5	0.02	0.24						
		GD2510M05	5	3.6 to 6.8	0.07	0.35	12000	0.05	1.90	3.26	0.13	32.3
		GD2510M12	12	6.0 to 13.5	0.03	0.36						
		GD2510H05	5	3.6 to 6.8	0.10	0.50	15000	0.07	2.38	5.10	0.20	37.6
		GD2510H12	12	6.0 to 13.5	0.05	0.60						
	30x30x10	GD3010L05	5	3.6 to 6.8	0.07	0.35	8500	0.08	2.78	3.15	0.12	28.9
		GD3010L12	12	6.0 to 13.5	0.03	0.36						
		GD3010L24	24	18 to 26.5	0.01	0.24						
		GD3010M05	5	3.6 to 6.8	0.15	0.75	10500	0.1	3.44	4.81	0.19	34.0
		GD3010M12	12	6.0 to 13.5	0.06	0.72						
		GD3010M24	24	18 to 26.5	0.03	0.72						
		GD3010H05	5	3.6 to 6.8	0.30	1.50	13000	0.12	4.25	7.37	0.29	39.1
		GD3010H12	12	6.0 to 13.5	0.12	1.44						
		GD3010H24	24	18 to 26.5	0.06	1.44						
	40x40x10	GD4010L05	5	3.6 to 6.8	0.12	0.6	6000	0.2	7.12	2.62	0.1	29.2
		GD4010L12	12	6.0 to 13.5	0.05	0.6						
		GD4010M12	12	6.0 to 13.5	0.08	0.96	7000	0.24	8.31	3.57	0.14	32.8
		GD4010M24	24	18 to 26.5	0.04	0.96						
		GD4010H12	12	6.0 to 13.5	0.12	1.44	8000	0.27	9.5	4.67	0.18	36.5
		GD4010H24	24	18 to 26.5	0.06	1.44						
	40x40x20	GD4020L05	5	3.6 to 6.8	0.15	0.75	6000	0.23	8.27	4.61	0.18	31.0
		GD4020L12	12	6.0 to 13.5	0.07	0.84						
		GD4020L24	24	18 to 26.5	0.03	0.72						
		GD4020M05	5	3.6 to 6.8	0.38	1.90	8000	0.31	11.02	8.19	0.32	37.9
		GD4020M12	12	6.0 to 13.5	0.16	1.92						
		GD4020M24	24	18 to 26.5	0.08	1.92						
		GD4020H12	12	6.0 to 13.5	0.31	3.72	10000	0.39	13.78	12.80	0.50	43.2
		GD4020H24	24	18 to 26.5	0.16	3.84						
	40x40x28	GD4028L12	12	6.0 to 13.5	0.08	0.96	8500	0.32	11.38	10.79	0.42	37.9
		GD4028L24	24	18 to 26.5	0.05	1.20						
		GD4028M12	12	6.0 to 13.5	0.28	3.36	13000	0.49	17.40	25.24	0.99	48.1
		GD4028M24	24	18 to 26.5	0.15	3.60						
		GD4028H12	12	6.0 to 13.5	0.8	9.6	20000	0.76	26.77	59.74	2.35	58.4
		GD4028H24	24	18 to 26.5	0.4	9.6						
	50x50x10	GD5010L05	5	3.6 to 6.8	0.1	0.50	5000	0.21	7.52	2.22	0.09	31
		GD5010L12	12	6.0 to 13.5	0.04	0.48						
		GD5010M05	5	3.6 to 6.8	0.15	0.75	6000	0.26	9.03	3.19	0.13	35.3
		GD5010M12	12	6.0 to 13.5	0.06	0.72						
		GD5010M24	24	18 to 26.5	0.03	0.72						
		GD5010H12	12	6.0 to 13.5	0.18	2.16	9000	0.39	13.78	7.30	0.29	46.6
		GD5010H24	24	18 to 26.5	0.09	2.16						

Please feel free contact us by info@acdcfan.com.cn for any customized requirements
如果您对以上产品有任何定制需求，请随时联系我们

DC Axial Fans - GD Series

Picture	Size	Model	Voltage	Voltage Range	Current	Power	Speed	Max. Air Flow		Max.Static Pressure		Noise
	mm	No.	VDC	VDC	A	W	RPM	m³/min	CFM	mmH_20	INH_20	dB(A)
	50x50x15	GD5015L05	5	3.6 to 6.8	0.2	1.0	5500	0.28	9.95	3.97	0.16	37.4
		GD5015L12	12	6.0 to 13.5	0.08	0.96						
		GD5015L24	24	18 to 26.5	0.04	0.96						
		GD5015M12	12	6.0 to 13.5	0.13	1.56	6500	0.33	11.76	5.55	0.22	41.4
		GD5015M24	24	18 to 26.5	0.06	1.44						
		GD5015H12	12	6.0 to 13.5	0.2	2.4	7500	0.38	13.57	7.38	0.29	44.8
		GD5015H24	24	18 to 26.5	0.1	2.4						
	50x50x20	GD5020L05	5	3.6 to 6.8	0.19	0.95	4500	0.32	11.15	2.72	0.11	29.5
		GD5020L12	12	6.0 to 13.5	0.07	0.84						
		GD5020L24	24	18 to 26.5	0.04	0.96						
		GD5020M05	5	3.6 to 6.8	0.30	1.50	5500	0.42	14.81	4.54	0.18	34.4
		GD5020M12	12	6.0 to 13.5	0.12	1.44						
		GD5020M24	24	18 to 26.5	0.06	1.44						
		GD5020H12	12	6.0 to 13.5	0.20	2.40	6500	0.5	17.5	6.18	0.24	40.3
		GD5020H24	24	18 to 26.5	0.10	2.40						
	60x60x15	GD6015L05	5	3.6 to 6.8	0.25	1.25	4000	0.42	14.95	2.6	0.10	33.1
		GD6015L12	12	6.0 to 13.5	0.10	1.2						
		GD6015L24	24	18 to 26.5	0.05	1.2						
		GD6015M12	12	6.0 to 13.5	0.20	2.4	5000	0.53	18.68	4.06	0.16	38.5
		GD6015M24	24	18 to 26.5	0.10	2.4						
		GD6015H12	12	6.0 to 13.5	0.30	3.6	6000	0.63	22.42	5.84	0.23	42.8
		GD6015H24	24	18 to 26.5	0.15	3.6						
	60x60x20	GD6020L05	5	3.6 to 6.8	02	0.5	3000	0.56	14.77	2.12	0.08	27.3
		GD6020L12	12	6.0 to 13.5	0.04	0.48						
		GD6020L24	24	18 to 26.5	0.02	0.48						
		GD6020M12	12	6.0 to 13.5	0.1	1.2	4000	0.70	19.69	3.77	0.15	34.2
		GD6020M24	24	18 to 26.5	0.05	1.2						
		GD6020H12	12	6.0 to 13.5	0.2	2.4	5000	0.52	24.61	5.89	0.23	39.5
		GD6020H24	24	18 to 26.5	0.1	2.4						
	60x60x25	GD6025L12	12	6.0 to 13.5	0.15	1.80	4000	0.52	18.36	3.82	0.15	34.6
		GD6025L24	24	18 to 26.5	0.07	1.68						
		GD6025L48	48	36 to 54	0.04	1.92						
		GD6025M12	12	6.0 to 13.5	0.2	2.4	5500	0.75	26.52	7.45	0.29	41.6
		GD6025M24	24	18 to 26.5	0.1	2.4						
		GD6025M48	48	36 to 54	0.06	2.88						
		GD6025H12	12	6.0 to 13.5	0.35	4.2	7000	0.89	31.39	11.16	0.44	47.4
		GD6025H24	24	18 to 26.5	0.19	4.56						
		GD6025H48	24	36 to 54	0.1	4.8						

DC Axial Fans - GD Series

Picture	Size	Model	Voltage	Voltage Range	Current	Power	Speed	Max. Air Flow		Max.Static Pressure		Noise
	mm	No.	VDC	VDC	A	W	RPM	m³/min	CFM	mmH_20	INH_20	dB(A)
	60x60x38 Xflow	GD6038L12	12	6.0 to 13.5	0.3	3.60	8000	0.81	28.68	17.40	0.69	45.5
		GD6038L24	24	18 to 26.5	0.14	3.36						
		GD6038L48	48	36 to 54	0.08	3.84						
		GD6038M12	12	6.0 to 13.5	0.7	8.4	12000	1.23	43.36	38.51	1.52	57.4
		GD6038M24	24	18 to 26.5	0.35	8.4						
		GD6038M48	48	36 to 54	0.2	9.6						
		GD6038H12	12	6.0 to 13.5	2.5	30	20000	2.18	76.89	107.32	4.23	69.2
		GD6038H24	24	18 to 26.5	0.7	16.8						
		GD6038H48	48	36 to 54	0.5	24						
	70x70x15	GD7015L05	5	3.6 to 6.8	0.21	1.05	3400	0.62	21.85	2.7	0.11	28.2
		GD7015L12	12	6.0 to 13.5	0.12	1.44						
		GD7015L24	24	18 to 26.5	0.07	1.68						
		GD7015M12	12	6.0 to 13.5	0.19	2.28	4000	0.71	25.01	3.6	0.142	32.7
		GD7015M24	24	18 to 26.5	0.09	2.16						
		GD7015H12	12	6.0 to 13.5	0.26	3.12	4500	0.82	29.02	4.65	0.183	34.8
		GD7015H24	24	18 to 26.5	0.13	3.12						
	70x70x20	GD7020L12	12	6.0 to 13.5	0.06	0.72	2500	0.57	20.13	1.70	0.07	28.5
		GD7020L24	24	18 to 26.5	0.03	0.72						
		GD7020M12	12	6.0 to 13.5	0.2	2.4	3500	0.8	28.19	3.31	0.13	36.5
		GD7020M24	24	18 to 26.5	0.1	2.4						
		GD7020H12	12	6.0 to 13.5	0.4	4.8	4500	1.03	36.24	5.47	0.22	42.5
		GD7020H24	24	18 to 26.5	0.2	4.8						
	70x70x25	GD7025L12	12	6.0 to 13.5	0.1	1.2	3000	0.64	22.71	3.49	0.14	34
		GD7025L24	24	18 to 26.5	0.07	1.68						
		GD7025M12	12	6.0 to 13.5	0.16	1.92	4000	0.93	32.64	6.07	0.24	41.9
		GD7025M24	24	18 to 26.5	0.11	2.64						
		GD7025H12	12	6.0 to 13.5	0.27	3.24	4900	1.26	44.37	11.24	0.44	45.6
		GD7025H24	24	18 to 26.5	0.17	4.08						
	80x80x15	GD8015L05	5	3.6 to 6.8	0.24	1.2	2000	0.61	21.26	1.29	0.05	26.6
		GD8015L12	12	6.0 to 13.5	0.1	1.2						
		GD8015M12	12	6.0 to 13.5	0.13	1.56	2500	0.83	29.51	2.77	0.11	29.2
		GD8015M24	24	18 to 26.5	0.08	1.92						
		GD8015H12	12	6.0 to 13.5	0.3	3.6	3500	1.04	36.64	4.05	0.16	35.6
		GD8015H24	24	18 to 26.5	0.15	4.32						

Please feel free contact us by info@acdcfan.com.cn for any customized requirements
如果您对以上产品有任何定制需求，请随时联系我们

DC Axial Fans - GD Series

Picture	Size	Model	Voltage	Voltage Range	Current	Power	Speed	Max. Air Flow		Max.Static Pressure		Noise
	mm	No.	VDC	VDC	A	W	RPM	m³/min	CFM	mmH_20	INH_20	dB(A)
	80x80x20	GD8020L12	12	6.0 to 13.5	0.11	1.32	2600	0.71	25.29	2.3	0.09	29.9
		GD8020L24	24	18 to 26.5	0.07	1.68						
		GD8020M12	12	6.0 to 13.5	0.19	2.28	3400	1.04	36.64	4.52	0.18	36.2
		GD8020M24	24	18 to 26.5	0.12	2.88						
		GD8020H24	24	18 to 26.5	0.24	5.76	5000	1.41	49.68	7.5	0.295	43.7
		GD8020H48	48	36 to 54	0.12	5.76						
	80x80x25 Xflow	GD8025L12	12	6.0 to 13.5	0.15	1.80	2500	0.9	31.85	2.15	0.08	31.5
		GD8025L24	24	18 to 26.5	0.08	1.92						
		GD8025L48	48	36 to 54	0.04	1.92						
		GD8025M12	12	6.0 to 13.5	0.30	3.60	3000	1.08	38.23	3.1	0.12	35.7
		GD8025M24	24	18 to 26.5	0.15	3.60						
		GD8025M48	48	36 to 54	0.07	3.36						
		GD8025H12	12	6.0 to 13.5	0.45	5.4	4500	1.62	57.34	6.97	0.27	45.4
		GD8025H24	24	18 to 26.5	0.25	6						
		GD8025H48	48	36 to 54	0.12	5.76						
NEW	80x80x25 XPressure	GD8025L12	12	6.0 to 13.5	0.07	0.84	2500	0.9	31.94	2.78	0.11	31.1
		GD8025L24	24	18 to 26.5	0.04	0.96						
		GD8025L48	48	36 to 54	0.03	1.44						
		GD8025M12	12	6.0 to 13.5	0.19	2.28	3000	1.26	44.62	5.44	0.21	40.9
		GD8025M24	24	18 to 26.5	0.12	2.88						
		GD8025M48	48	36 to 54	0.07	3.36						
		GD8025H12	12	6.0 to 13.5	0.4	4.8	4500	1.63	57.5	9	0.35	47.16
		GD8025H24	24	18 to 26.5	0.25	6						
		GD8025H48	48	36 to 54	0.15	7.2						
	80x80x38 XPressure	GD8038L12	12	6.0 to 13.5	0.24	2.88	4000	1.32	46.54	7.58	0.3	48.5
		GD8038L24	24	18 to 26.5	0.12	2.88						
		GD8038L48	48	36 to 54	0.07	3.36						
		GD8038M12	12	6.0 to 13.5	0.80	9.60	6000	2.00	70.73	18.04	0.71	56.9
		GD8038M24	24	18 to 26.5	0.40	9.60						
		GD8038M48	48	36 to 54	0.20	9.60						
		GD8038H12	12	6.0 to 13.5	1.80	21.6	8000	2.89	102.23	35.24	1.39	65.8
		GD8038H24	24	18 to 26.5	0.90	21.6						
		GD8038H48	48	36 to 54	0.45	21.6						
	92x92x25	GD9225L12	12	6.0 to 13.5	0.13	1.56	2500	1.08	38.12	2.26	0.09	31.7
		GD9225L24	24	18 to 26.5	0.06	1.44						
		GD9225L48	48	36 to 54	0.04	1.92						
		GD9225M12	12	6.0 to 13.5	0.25	3	3500	1.51	53.3	4.42	0.17	38.5
		GD9225M24	24	18 to 26.5	0.12	2.88						
		GD9225M48	48	36 to 54	0.06	2.88						
		GD9225H12	12	6.0 to 13.5	0.52	6.24	4500	2.07	73.2	8.03	0.32	45.8
		GD9225H24	24	18 to 26.5	0.25	6						
		GD9225H48	48	36 to 54	0.13	6.24						

DC Axial Fans - GD Series

Picture	Size	Model	Voltage	Voltage Range	Current	Power	Speed	Max. Air Flow		Max.Static Pressure		Noise
	mm	No.	VDC	VDC	A	W	RPM	m³/min	CFM	mmH_20	INH_20	dB(A)
		GD923812	12	6.0 to 13.5	0.27	3.24						
		GD9238L24	24	18 to 26.5	0.15	3.6	4000	1.90	67.27	9.2	0.36	46.9
		GD9238L48	48	36 to 54	0.08	3.84						
		GD9238M12	12	6.0 to 13.5	0.9	10.8						
	92x92x38 XPressure	GD9238M24	24	18 to 26.5	0.5	12	6000	2.86	100.98	20.69	0.81	56.6
		GD9238M48	48	36 to 54	0.25	12						
		GD9238H12	12	6.0 to 13.5	1.80	21.6						
		GD9238H24	24	18 to 26.5	0.90	21.6	7500	3.57	126.12	32.33	1.27	61.9
		GD9238H48	48	36 to 54	0.45	21.6						
		GD9238L12	12	6.0 to 13.5	0.88	10.56						
		GD9238L24	24	18 to 26.5	0.44	10.56	8000	3.19	112.81	30.58	1.2	58.3
		GD9238L48	48	36 to 54	0.22	10.56						
NEW		GD9238M12	12	6.0 to 13.5	1.80	21.6						
	92x92x38 XSpeed	GD9238M24	24	18 to 26.5	0.9	21.6	10000	3.99	141.02	47.78	1.88	63.7
		GD9238M48	48	36 to 54	0.45	21.6						
		GD9238H12	12	6.0 to 13.5	3	36						
		GD9238H24	24	18 to 26.5	1.50	36	12000	4.79	169.2	68.81	2.71	68
		GD9238H48	48	36 to 54	0.75	36						
		GD12025L12	12	6.0 to 13.5	0.15	1.80						
		GD12025L24	24	18 to 26.5	0.09	2.16	2000	1.70	60.23	2.54	0.1	37.1
		GD12025L48	48	36 to 54	0.04	1.92						
		GD12025M12	12	6.0 to 13.5	0.27	3.24						
	120x120x25	GD12025M24	24	18 to 26.5	0.13	3.12	2500	2.13	75.29	4.02	0.16	42.4
		GD12025M48	48	36 to 54	0.07	3.36						
		GD12025H12	12	6.0 to 13.5	0.60	7.2						
		GD12025H24	24	18 to 26.5	0.30	7.2	3500	2.98	105.4	7.77	0.31	50.5
		GD12025H48	48	36 to 54	0.15	7.2						
		GD12025L12	12	6.0 to 13.5	0.3	3.6						
		GD12025L24	24	18 to 26.5	0.14	3.36	2500	2.20	77.64	4.61	0.18	42.7
		GD12025L48	48	36 to 54	0.07	3.36						
NEW		GD12025M12	12	6.0 to 13.5	0.60	7.2						
	120x120x25 XPressure	GD12025M24	24	18 to 26.5	0.30	7.2	3500	3.04	107.25	8.39	0.33	50.1
		GD12025M48	48	36 to 54	0.15	7.2						
		GD12025H12	12	6.0 to 13.5	1.10	13.2						
		GD12025H24	24	18 to 26.5	0.53	12.72	4500	3.9	137.92	14.05	0.55	55.7
		GD12025H48	48	36 to 54	0.27	12.96						

Please feel free contact us by info@acdcfan.com.cn for any customized requirements
如果您对以上产品有任何定制需求，请随时联系我们

DC Axial Fans - GD Series

Picture	Size	Model	Voltage	Voltage Range	Current	Power	Speed	Max. Air Flow		Max.Static Pressure		Noise
	mm	No.	VDC	VDC	A	W	RPM	m³/min	CFM	mmH_2O	INH_2O	dB(A)
	120x120x38	GD12038L12	12	6.0 to 13.5	0.30	3.6	2500	2.7	95.54	5.24	0.21	41.8
		GD12038L24	24	18 to 26.5	0.12	2.88						
		GD12038L48	48	36 to 54	0.08	3.84						
		GD12038M12	12	6.0 to 13.5	0.70	8.4	3500	3.78	133.54	10.37	0.41	50.4
		GD12038M24	24	18 to 26.5	0.32	7.68						
		GD12038M48	48	36 to 54	0.18	8.64						
		GD12038H12	12	6.0 to 13.5	1.5	18	4500	4.86	171.7	17.14	0.67	56.4
		GD12038H24	24	18 to 26.5	0.70	16.8						
		GD12038H48	48	36 to 54	0.40	19.2						
	120x120x38 XPressure	GD12038L12	12	6.0 to 13.5	1.25	15.00	3500	4.24	149.66	13.27	0.52	57.3
		GD12038L24	24	18 to 26.5	0.61	14.64						
		GD12038L48	48	36 to 54	0.31	14.88						
		GD12038M12	12	6.0 to 13.5	2.40	28.80	4500	5.45	192.42	21.94	0.86	63.3
		GD12038M24	24	18 to 26.5	1.30	31.20						
		GD12038M48	48	36 to 54	0.60	28.80						
NEW	120x120x38 Xflow	GD12038 Xflow	48	36 to 54	1.6	76.8	8000	8.06	285.04	57.73	2.27	71.2
			48	36 to 54	3.1	148.8	10000	10.8	356.3	90.02	3.55	76.5
NEW	140x140x38 XPressure	GD14038L12	12	6.0 to 13.5	0.24	2.88	3000	3.32	117.42	13.03	0.51	46
		GD14038L24	24	18 to 26.5	0.12	2.88						
		GD14038L48	48	36 to 54	0.06	2.88						
		GD14038M12	12	6.0 to 13.5	1.10	13.2	5000	5.7	200.62	34.43	1.35	59.8
		GD14038M24	24	18 to 26.5	0.54	12.96						
		GD14038M48	48	36 to 54	0.27	12.9						
		GD14038H12	12	6.0 to 13.5	3.0	36	7000	8.07	285.32	64.7	2.54	64.7
		GD14038H24	24	18 to 26.5	1.50	12						
		GD14038H48	48	36 to 54	0.80	38.4						
	150x150x50	GD15050L12	12	6.0 to 13.5	1.10	13.20	3000	6.25	220.94	12.81	0.5	56.7
		GD15050L24	24	18 to 26.5	0.52	12.48						
		GD15050L48	48	36 to 54	0.27	12.96						
		GD15050M12	12	6.0 to 13.5	1.7	20.4	3500	7.29	257.52	19.6	0.77	60.4
		GD15050M24	24	18 to 26.5	0.82	19.68						
		GD15050M48	48	36 to 54	0.40	19.2						
		GD15050H12	12	6.0 to 13.5	3.60	43.20	4500	9.38	331.41	28.83	1.14	66.4
		GD15050H24	24	18 to 26.5	1.74	41.76						
		GD15050H48	48	36 to 54	0.88	42.24						
	172x150x51	GD17250L12	12	6.0 to 13.5	1.10	13.2	3000	6.25	220.94	12.81	0.5	56.7
		GD17250L24	24	18 to 26.5	0.52	12.48						
		GD17250L48	48	36 to 54	0.27	12.96						
		GD17250M12	12	6.0 to 13.5	1.7	20.4	3500	7.29	257.52	19.60	0.77	60.4
		GD17250M24	24	18 to 26.5	0.82	19.68						
		GD17250M48	48	36 to 54	0.4	19.2						
		GD17250H12	12	6.0 to 13.5	3.6	43.20	4500	9.38	331.41	28.83	1.14	66.4
		GD17250H24	24	18 to 26.5	1.74	41.76						
		GD17250H48	48	36 to 54	0.88	42.24						
NEW	172x150x51 XSpeed	GD17250M24B	24	18 to 26.5	5	120	6500	14.83	490	72.79	2.87	71
		GD17250H48B	48	36 to 54	5.1	245	8000	18.25	605	110.26	4.34	75

DC Axial Fans - GD Series

Picture	Size	Model	Voltage	Voltage Range	Current	Power	Speed	Max. Air Flow		Max.Static Pressure		Noise
	mm	No.	VDC	VDC	A	W	RPM	m³/min	CFM	mmH_2O	INH_2O	dB(A)
	180x180x60	GD18060L12	12	6.0 to 13.5	2.5	30	2500	8.93	315.39	13.18	0.52	55.8
		GD18060L24	24	18 to 26.5	1.5	36						
		GD18060L48	48	36 to 54	0.8	38.4						
		GD18060M12	12	6.0 to 13.5	4	48	3500	11.1	392.03	21.71	0.86	64.9
		GD18060M24	24	18 to 26.5	2	48						
		GD18060M48	48	36 to 54	1.2	57.6						
		GD18060H12	12	6.0 to 13.5	6	72	4300	14.88	525.26	32.36	1.27	69.3
		GD18060H24	24	18 to 26.5	4	96						
		GD18060H48	48	36 to 54	2	96						
	200x200x60	GD20060L12	12	6.0 to 13.5	2.15	25.8	2500	11.33	400.42	11.14	0.44	59.7
		GD20060L24	24	18 to 26.5	1	24						
		GD20060L48	48	36 to 54	0.52	24.96						
		GD20060M12	12	6.0 to 13.5	3.6	43.2	3000	13.6	480.5	16.04	0.63	64.1
		GD20060M24	24	18 to 26.5	1.76	42.24						
		GD20060M48	48	36 to 54	0.9	43.2						
		GD20060H12	12	6.0 to 13.5	5.7	68.4	3500	15.86	560.58	21.83	0.86	67.8
		GD20060H24	24	18 to 26.5	2.8	67.2						
		GD20060H48	48	36 to 54	1.37	65.76						
	Ø220x60	GD22060L12	12	6.0 to 13.5	2.15	25.8	2500	11.33	400.42	11.14	0.44	59.7
		GD22060L24	24	18 to 26.5	1	24						
		GD22060L48	48	36 to 54	0.52	24.96						
		GD22060M12	12	6.0 to 13.5	3.6	43.2	3000	13.6	480.5	16.04	0.63	64.1
		GD22060M24	24	18 to 26.5	1.76	42.24						
		GD22060M48	48	36 to 54	0.9	43.2						
		GD22060H12	12	6.0 to 13.5	5.7	68.4	3500	15.86	560.58	21.83	0.86	67.8
		GD22060H24	24	18 to 26.5	2.8	67.2						
		GD22060H48	48	36 to 54	1.37	65.76						
	Ø254x89	GD25489L12	12	6.0 to 13.5	3.5	42	2000	16	565	16.4	0.65	63.8
		GD25489L24	24	18 to 26.5	1.5	36						
		GD25489L48	48	36 to 54	0.8	38.4						
		GD25489M24	24	18 to 26.5	3.7	88.8	3000	24.5	864	34.4	1.35	73.5
		GD25489M48	48	36 to 54	1.9	91.2						
		GD25489H24	24	18 to 26.5	7.8	187.2	4000	37.4	1321	43	1.7	90
		GD25489H48	48	36 to 54	4	192						

Please feel free contact us by info@acdcfan.com.cn for any customized requirements

如果您对以上产品有任何定制需求，请随时联系我们

DC Radial Fans - GRD Series

Picture	Size	Model	Voltage	Voltage Range	Current	Power	Speed	Max. Air Flow		Max.Static Pressure		Noise
	mm	No.	VDC	VDC	A	W	RPM	m³/min	CFM	mmH_2O	INH_2O	dB(A)
	50x50x15	GRD5015L05	5	3.6 to 6.8	0.1	0.5	4000	0.08	2.74	2.11	0.08	50.9
		GRD5015L12	12	6.0 to 13.5	0.04	0.48						
		GRD5015M05	5	3.6 to 6.8	0.16	0.8	5000	0.1	3.43	3.29	0.13	56.3
		GRD5015M12	12	6.0 to 13.5	0.07	0.84						
		GRD5015M24	24	18 to 26.5	0.04	0.96						
		GRD5015H12	12	6.0 to 13.5	0.16	1.92	6500	0.13	4.45	5.56	0.22	62.5
		GRD5015H24	24	18 to 26.5	0.08	1.92						
	50x50x20	GRD5020L05	5	3.6 to 6.8	0.17	0.85	4000	0.081	3.09	15.222	0.599	32.1
		GRD5020L12	12	6.0 to 13.5	0.14	1.68						
		GRD5020L12	24	18 to 26.5	0.07	1.68						
		GRD5020M05	5	3.6 to 6.8	0.39	1.95	5000	0.109	3.87	19.028	0.749	37
		GRD5020M12	12	6.0 to 13.5	0.19	2.28						
		GRD5020M24	24	18 to 26.5	0.11	2.64						
		GRD5020H12	12	6.0 to 13.5	0.23	2.76	5500	0.121	4.26	20.931	0.824	39.6
		GRD5020H24	24	18 to 26.5	0.15	3.6						
	50x50x25	GRD5025L05	5	3.6 to 6.8	0.16	0.8	3000	0.087	3.09	5.222	0.206	34.5
		GRD5025L12	12	6.0 to 13.5	0.11	1.32						
		GRD5015M05	5	3.6 to 6.8	0.35	1.75	4000	0.113	3.993	11.24	0.442	40.3
		GRD5025M12	12	6.0 to 13.5	0.2	2.4						
		GRD5025M24	24	18 to 26.5	0.1	2.4						
		GRD5025H12	12	6.0 to 13.5	0.25	3	5000	0.151	5.305	20.801	0.819	46.2
		GRD5025H24	24	18 to 26.5	0.12	2.88						
	75x75x30	GRD7530L12	12	6.0 to 13.5	0.06	0.72	2000	0.22	7.81	6.85	0.27	28.6
		GRD7530L24	24	18 to 26.5	0.03	0.72						
		GRD7530M12	12	6.0 to 13.5	0.2	2.4	3000	0.33	11.72	15.41	0.61	38.2
		GRD7530M24	24	18 to 26.5	0.1	2.4						
		GRD7530M48	48	36 to 54	0.05	2.4						
		GRD7530H24	24	18 to 26.5	0.2	4.8	3700	0.41	14.46	23.45	0.92	43.3
		GRD7530H48	48	36 to 54	0.1	4.8						

DC Radial Fans - GRD Series

Picture	Size	Model	Voltage	Voltage Range	Current	Power	Speed	Max. Air Flow		Max.Static Pressure		Noise
	mm	No.	VDC	VDC	A	W	RPM	m^3/min	CFM	mmH_20	INH_20	dB(A)
	97x97x33	GRD9733L12	12	6.0 to 13.5	0.14	1.68	2500	0.41	14.52	8.15	0.32	39.3
		GRD9733L24	24	18 to 26.5	0.07	1.68						
		GRD9733M12	12	6.0 to 13.5	0.32	3.84	3500	0.58	20.59	15.75	0.62	49.2
		GRD9733M24	24	18 to 26.5	0.16	3.84						
		GRD9733H12	12	6.0 to 13.5	0.68	8.16	4500	0.74	26.14	26.39	1.04	53.3
		GRD9733H24	24	18 to 26.5	0.35	8.4						
	100x95x15	GRD10015L12	12	6.0 to 13.5	0.17	2.04	2000	0.3	10.65	4.06	0.16	30.5
		GRD10015L24	24	18 to 26.5	0.12	2.88						
		GRD10015M12	12	6.0 to 13.5	0.55	6.6	3000	0.49	17.58	9.78	0.39	40.2
		GRD10015M24	24	18 to 26.5	0.28	6.72						
		GRD10015H12	12	6.0 to 13.5	0.7	8.4	4000	0.66	23.28	13.78	0.54	47.1
		GRD10015H24	24	18 to 26.5	0.32	7.68						
	120x120x32	GRD12032L12	12	6.0 to 13.5	0.4	4.8	2500	0.69	24.50	16.24	0.65	47.6
		GRD12032L24	24	18 to 26.5	0.2	4.8						
		GRD12032M12	12	6.0 to 13.5	1	12	3000	0.83	29.43	25.64	1.01	52
		GRD12032M24	24	18 to 26.5	0.5	12						
		GRD12032M48	48	36 to 54	0.25	12						
		GRD12032H12	12	6.0 to 13.5	1.1	13.2	3500	0.97	34.30	32.18	1.27	55.6
		GRD12032H24	24	18 to 26.5	0.55	13.2						
		GRD12032H48	48	36 to 54	0.28	13.44						

Please feel free contact us by info@acdcfan.com.cn for any customized requirements
如果您对以上产品有任何定制需求，请随时联系我们

Excellence in energy-saving

EC Axial Fans

GE Series

Features

- Size range from 60mm to 220mm
- Voltage: 110V, 220V
- Operation temperatures range: -30°C ~ +70°C (Ball bearing)
- Speed from 2000 rpm to 10,000 rpm
- Service life from 30,000 to 70,000 hours
- Optional functions: PWM, FG, RD

Certificates

EC Axial Fans - GE Series

Picture	Size	Model	Voltage	Voltage Range	Current	Power	Speed	Max. Air Flow		Max.Static Pressure		Noise
	mm	No.	VAC	VAC	A	W	RPM	m^3/min	CFM	mmH_20	INH_20	dB(A)
	60x60x25	GE6025M1/2	110/220	100~240	50/60	4.2	6000	0.78	27.6	8.04	0.32	43.1
	80x80x25 Xflow	GE8025M1/2	110/220	100~240	50/60	4.8	3000	1.08	38.23	3.1	0.12	35.7
	80x80x38 XPressure	GE8038M1/2	110/220	100~240	50/60	12	6000	2	70.73	18.04	0.71	56.9
	92x92x25	GE9225M1/2	110/220	100~240	50/60	4	3500	1.51	53.3	4.42	0.17	38.5
	92x92x38 XPressure	GE9238M1/2	110/220	100~240	50/60	12	6000	2.86	100.98	20.69	0.81	56.6
	120x120x25	GE12025M1/2	110/220	100~240	50/60	4	2500	2.13	75.29	4.02	0.16	42.4
	120x120x38	GE12038L1/2	110/220	100~240	50/60	5	2000	2.16	76.31	3.39	0.13	37
		GE12038M1/2				8	3000	3.24	114.47	7.62	0.3	46.7
		GE12038H1/2				13	4000	4.32	152.62	13.54	0.53	53.7
	150x150x50	GE15050M110	110	100~125	50/60	25	3500	7.29	257.52	19.6	0.77	60.4
		GE15050M220	220	200~240	50/60	25						
	172x150x51	GE17250M110	110	100~125	50/60	25	3500	7.29	257.52	19.6	0.77	60.4
		GE17250M220	220	200~240	50/60	25						
	180x180x60	GE18060M110	110	100~125	50/60	40	3500	11.09	392.03	21.71	0.85	64.9
		GE18060M220	220	200~240	50/60	40						
	200x200x60	GE20060M110	110	100~125	50/60	40	3000	14.67	518.41	18.24	0.72	62.9
		GE20060M220	220	200~240	50/60	40						
	Ø220x60	GE22060M110	110	100~125	50/60	40	3000	14.67	518.41	18.24	0.72	62.9
		GE22060M220	220	200~240	50/60	40						

Please feel free contact us by info@acdcfan.com.cn for any customized requirements

如果您对以上产品有任何定制需求，请随时联系我们

Fan and Filter Units
&
Fan Accessories

- Plastic Fan Filter
- Plastic Fan Guard
- Aluminum Screen Filter
- Metal Finger Guard

Fan and Filter Units

Fan Accessories

Plastic Fan Filter

For 40-200mm fans

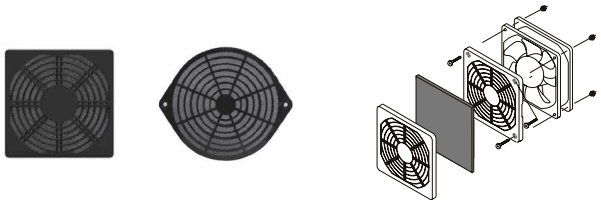

Plastic Fan Guard

For 80-254mm fans

Aluminum Screen Filter

For 60-170mm fans

Metal Finger Guard

For 40-280mm fans

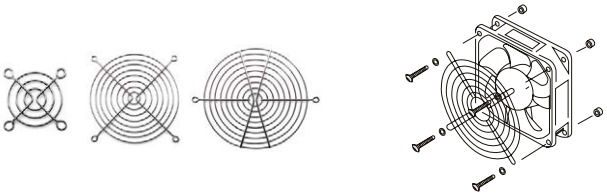

Please feel free contact us by info@acdcfan.com.cn for any customized requirements

如果您对以上产品有任何定制需求，请随时联系我们

ACDCFAN

Guangzhou Guanxie Fan Manufacturing Co.,Ltd.
Guanxie(Guangzhou) Trading Development Co.,Ltd.

Room 1012, Lai Fung International Center, No.33 Jiefang South Road,
Yuexiu District, Guangzhou, China 510095

+86 183 1666 5997

+86 020-36678158

+86 020-83377440

info@acdcfan.com.cn

www.acdcecfan.com

Factory : No. 1 Shaxi Industrial Park Road, Jianggao Town, Baiyun District,
Guangzhou, China 510450

V1 2026.01 13®